


Outgassing Compliant Power Inductors AE514PYA

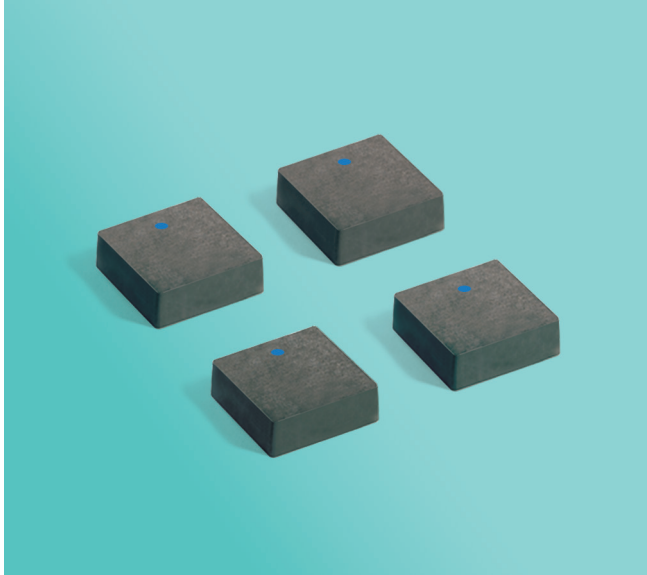

- High temperature materials allow operation in ambient temperatures up to 155°C
- Passes NASA low outgassing specifications
- Passes vibration testing to 80 G and shock testing to 1000 G
- Tin-lead (Sn-Pb) termination for the best possible board adhesion
- High current and very low DCR
- Soft saturation makes them ideal for VRM/VRD applications.
- Special coating added to ensure DWV compliance (CP-T0730)*

Core material Composite

Terminations Tin-lead (63/37) over copper.

Weight 0.63 – 1.22 g

Ambient temperature –55°C to +105°C with Irms current

Maximum part temperature +155°C (ambient + temp rise).

Storage temperature Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 400 per 7" reel
Plastic tape: 16 mm wide, 0.35 mm thick, 12 mm pocket spacing, 3.0 mm pocket depth

Part number ¹	Inductance ² ±20% (µH)	DCR (mOhms) ³		SRF (MHz) ⁴		Isat ⁵ (A)	Irms (A) ⁶	
		typ	max	min	typ		20°C rise	40°C rise
AE514PYA161MSZ	0.16	1.15	1.26	126	158	60.0	18.7	24.4
AE514PYA301MSZ	0.30	1.75	1.92	81	101	41.0	15.8	20.7
AE514PYA601MSZ	0.60	3.00	3.30	58	72	36.0	13.5	17.3
AE514PYA102MSZ	1.0	4.55	5.00	41	52	28.0	12.1	16.4
AE514PYA152MSZ	1.5	7.60	8.36	31	39	23.5	8.9	11.3
AE514PYA222MSZ	2.2	13.70	15.07	23	29	18.0	7.5	9.7
AE514PYA272MSZ	2.7	15.70	17.30	25	32	12.8	6.7	8.6
AE514PYA332MSZ	3.3	19.50	21.45	20	25	12.3	6.0	7.5
AE514PYA472MSZ	4.7	25.20	27.72	17	21	12.0	5.2	6.8
AE514PYA562MSZ	5.6	30.25	33.30	14	17	11.5	4.0	5.5
AE514PYA682MSZ	6.8	45.00	51.75	12	15	8.7	3.3	5.1
AE514PYA822MSZ	8.2	53.00	60.95	10	13	8.4	2.2	4.4

1. When ordering, please specify **screening** code:

AE514PYA822MSZ

Screening: Z = Unscreened

Y = Unscreened (SLDC Option A)

W = Unscreened (SLDC Option B)

H = Group A screening per Coilcraft CP-SA-10001

G = Coilcraft CP-SA-10001 Group A (SLDC Option A)

D = Coilcraft CP-SA-10001 Group A (SLDC Option B)

*AE514PYA and CP-T0730 are drop-in replacements.

For additional screening options, use part number CP-T0730-xxxMSx and specify **screening** code:

CP-T0730-822MSZ

1 = EEE-INST-002 (Family 1) Level 1

2 = EEE-INST-002 (Family 1) Level 2

3 = EEE-INST-002 (Family 1) Level 3

4 = MIL-STD-981 (Family 04) Class B

5 = MIL-STD-981 (Family 04) Class S

F = ESCC3201 (F4 operational life performed at 105°C)

- Screening performed to the document's latest revision.
- Custom testing also available.

Irms Testing

Irms testing was performed on a 0.060" thick pcb with 4 oz. copper traces optimized to minimize additional temperature rise.

Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A.

3. DCR measured using a micro-ohmmeter.

4. SRF measured using an Agilent/HP 4395A or equivalent.

5. DC current at 25°C that causes an inductance drop of 30% (typ) from its value without current.













6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

AE514PYA Series (7030)

L vs Current

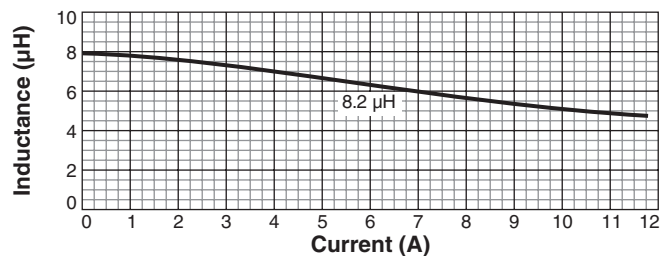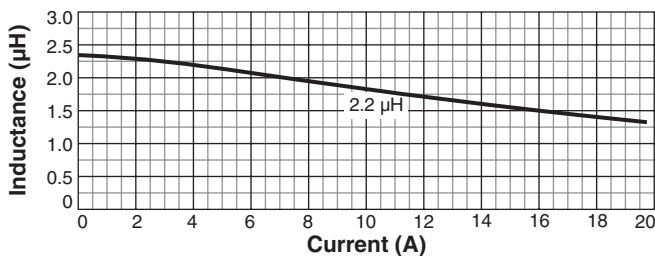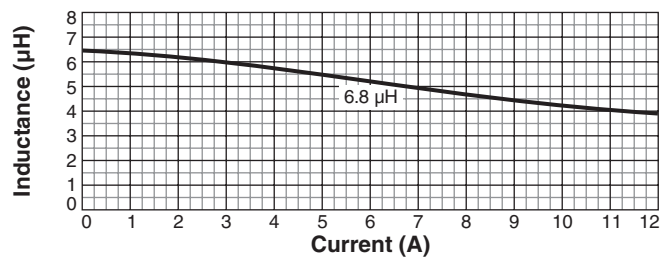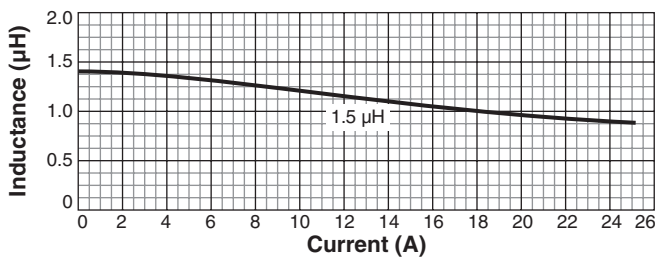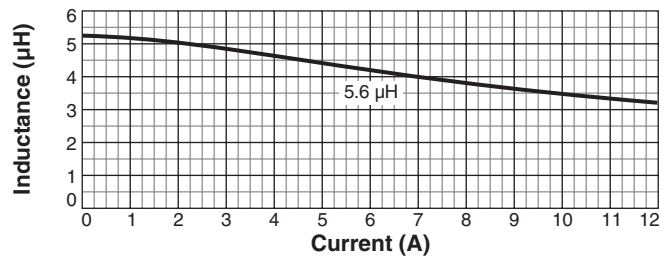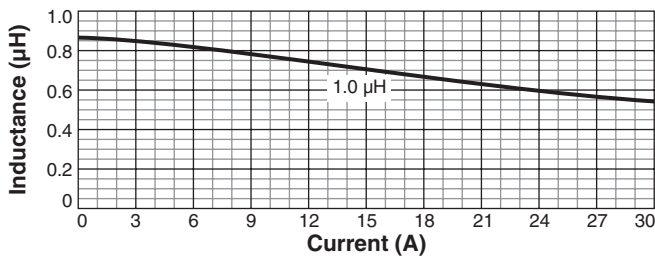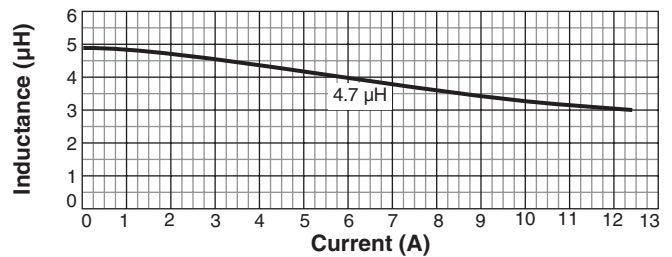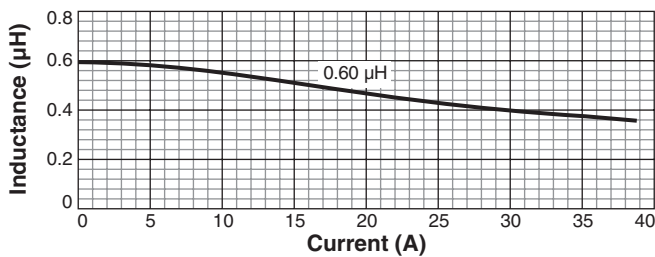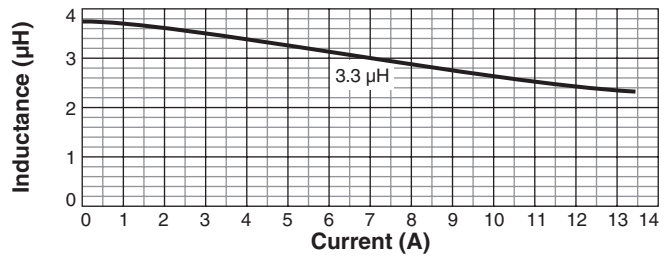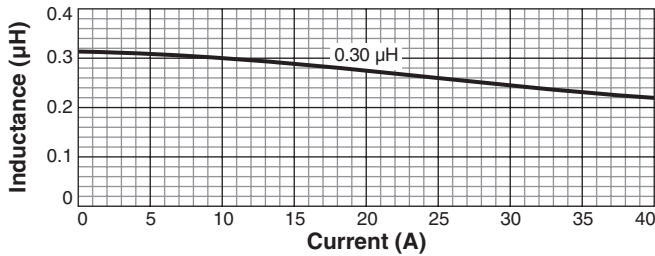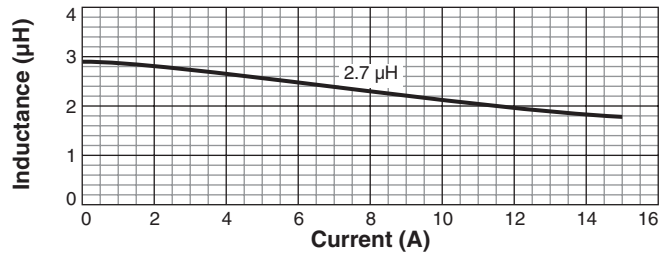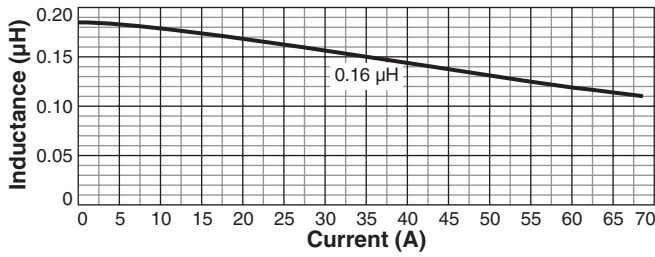

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363






Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document AE863-2 Revised 04/21/25

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

AE514PYA Series (7030)

Typical L vs Frequency

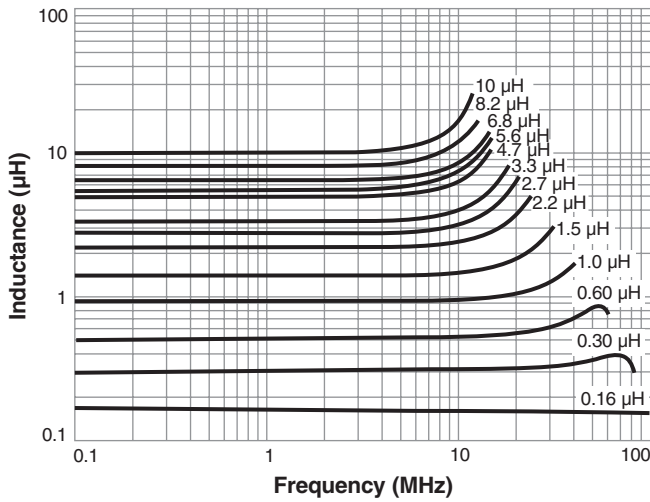

Suggested Land Pattern

Dash number	A		B	
	Terminal width ±0.004 / ±0,10 (in / mm)	Land pattern width (in / mm)	Terminal width ±0.004 / ±0,10 (in / mm)	Land pattern width (in / mm)
-161	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-301	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-601	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-102	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-152	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-222	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-272	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-332	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-472	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-562	0.063 / 1,60	0.070 / 1.78	0.063 / 1,60	0.070 / 1.78
-682	0.055 / 1,40	0.062 / 1.58	0.055 / 1,40	0.062 / 1.58
-822	0.055 / 1,40	0.062 / 1.58	0.055 / 1,40	0.062 / 1.58

* Height dimension shown is for the mounted part after reflow.
Dimension before mounting can be an additional 0.008 inch / 0,2 mm.

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

