

# High-Reliability Power Inductors MS412PJB



- High temperature materials allow operation in ambient temperatures up to 155°C
- Special construction allows it to pass vibration testing to 80 G and shock testing to 1000 G.
- Tin-lead (Sn-Pb) termination for the best possible board adhesion

**Core material** Ferrite

**Terminations** Tin-lead (63/37) over tin over nickel.

**Weight** 50 – 62 mg

**Ambient temperature** –55°C to +105°C with (40°C) Irms current

**Maximum part temperature** +155°C (Ambient + temp rise)

**Storage temperature** Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles


**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging** 1000/7" reel


Plastic tape: 12 mm wide, 0.26 mm thick, 8 mm pocket spacing, 1.65 mm pocket depth

**Recommended pick and place nozzle** OD: 3 mm; ID: ≤1.5 mm

## Typical L vs Frequency

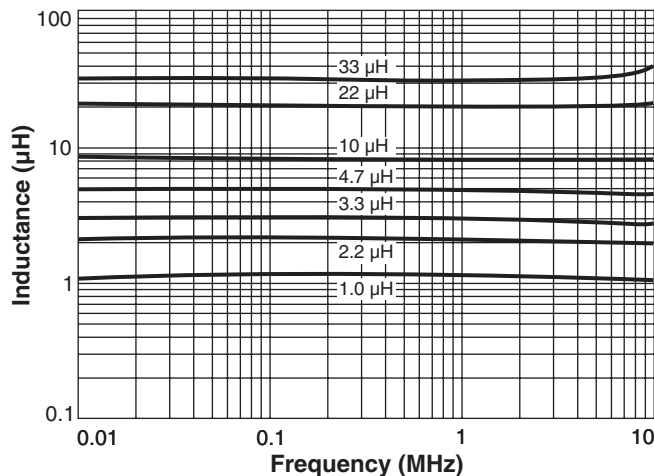

## Typical L vs Current

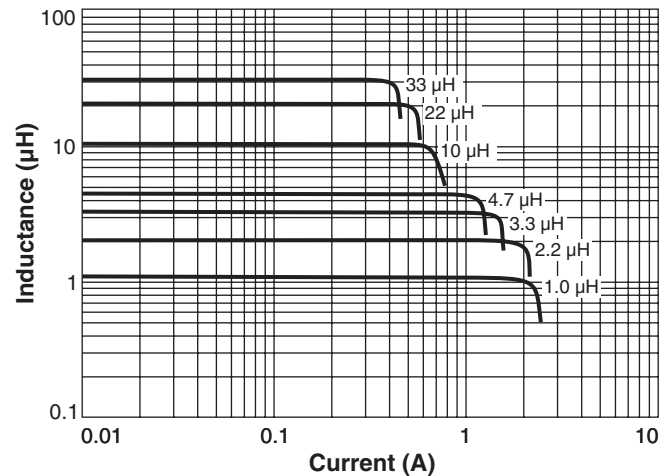

# MS412PJB Series (3015)

Part number <sup>1</sup>	Inductance <sup>2</sup> ±20% (µH)	DCR max <sup>3</sup> (Ohms)	SRF (MHz) <sup>4</sup>		Isat (A) <sup>5</sup>			Irms (A) <sup>6</sup>	
			min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
MS412PJB102MSZ	1.0	0.075	133	190	1.8	2.0	2.1	1.1	1.6
MS412PJB152MSZ	1.5	0.100	98.0	140	1.8	2.1	2.2	1.0	1.4
MS412PJB182MSZ	1.8	0.100	94.5	135	1.5	1.7	2.1	0.88	1.1
MS412PJB222MSZ	2.2	0.110	77.0	110	2.0	2.0	2.1	0.88	1.1
MS412PJB332MSZ	3.3	0.130	63.0	90	1.4	1.5	1.5	0.80	1.1
MS412PJB472MSZ	4.7	0.200	55.3	79	1.1	1.2	1.2	0.72	1.0
MS412PJB682MSZ	6.8	0.300	40.6	58	0.83	0.86	0.89	0.54	0.72
MS412PJB103MSZ	10	0.440	33.6	48	0.60	0.69	0.73	0.44	0.60
MS412PJB153MSZ	15	0.700	24.5	35	0.58	0.61	0.62	0.35	0.47
MS412PJB183MSZ	18	0.750	23.1	33	0.56	0.58	0.59	0.34	0.46
MS412PJB223MSZ	22	0.825	21.0	30	0.48	0.49	0.50	0.34	0.46
MS412PJB333MSZ	33	1.30	16.1	23	0.39	0.41	0.42	0.28	0.38
MS412PJB473MSZ	47	1.55	11.9	17	0.36	0.38	0.39	0.24	0.32
MS412PJB683MSZ	68	2.25	9.80	14	0.30	0.31	0.32	0.20	0.26
MS412PJB104MSZ	100	3.40	7.70	11	0.24	0.25	0.26	0.15	0.21
MS412PJB124MSZ	120	4.60	6.30	9.0	0.21	0.22	0.23	0.14	0.18
MS412PJB154MSZ	150	6.10	5.60	8.0	0.19	0.20	0.20	0.12	0.16
MS412PJB184MSZ	180	8.60	5.25	7.5	0.16	0.17	0.17	0.10	0.14
MS412PJB224MSZ	220	9.50	4.20	6.0	0.15	0.16	0.16	0.090	0.12
MS412PJB334MSZ	330	23.0	3.50	5.0	0.10	0.11	0.11	0.060	0.080

1. When ordering, please specify **screening** code:

**MS412PJB333MSZ**

**Screening: Z** = Unscreened

**Y** = Unscreened (SLDC Option A)

**W** = Unscreened (SLDC Option B)

**H** = Coilcraft CP-SA-10001 Group A

**G** = Coilcraft CP-SA-10001 Group A (SLDC Option A)

**D** = Coilcraft CP-SA-10001 Group A (SLDC Option B)

**1** = EEE-INST-002 (Family 1) Level 1

**2** = EEE-INST-002 (Family 1) Level 2

**3** = EEE-INST-002 (Family 1) Level 3

**4** = MIL-STD-981 (Family 04) Class B

**5** = MIL-STD-981 (Family 04) Class S

**F** = ESCC3201 (F4 operational life performed at 105°C)

• Screening performed to the document's latest revision.

• Lot qualification (Group B) available.

• Testing T and U have been replaced with more detailed codes 4, 5, and 1, 2, 3, respectively. Codes T and U can still be used, if necessary. Custom testing also available.

• Country of origin restrictions available; prefix options G or F.

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A.

Inductance at 1 MHz is the same for parts with SRF ≥10 MHz.

3. DCR measured on a micro-ohmmeter.


4. SRF measured using an Agilent/HP 8753ES or equivalent.

5. DC current at 25°C that causes the specified inductance drop from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

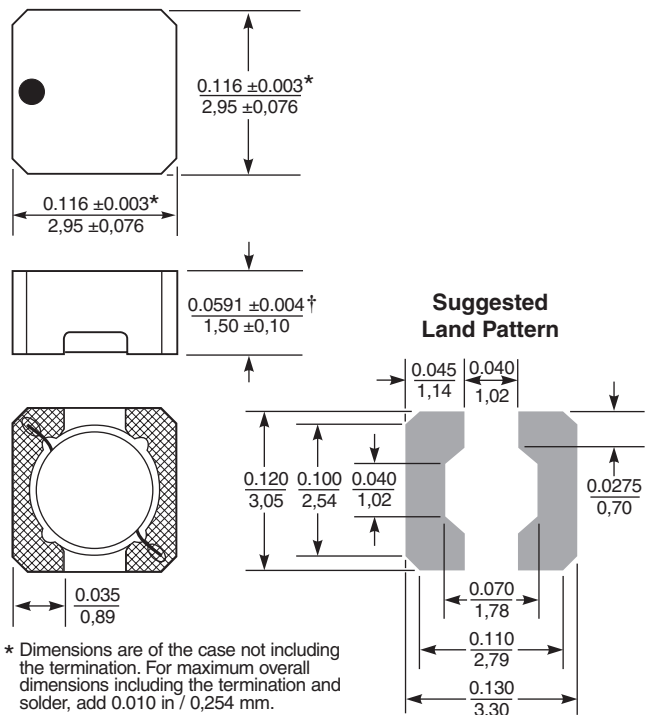

\* Dimensions are of the case not including the termination. For maximum overall dimensions including the termination and solder, add 0.010 in / 0,254 mm.

† Height dimension is after mounting. For maximum height dimension before mounting, add 0.006 in / 0,152 mm.

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$



CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document MS436-2 Revised 04/20/23

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.