

240°C Air Core Inductors AT392RAS



- Excellent Q factors – up to 130
- Current handling as high as 4.0 Amps!
- 5 inductance values from 8.1 to 27.3 nH
- Flat top and bottom for reliable pick and place and mechanical stability
- Special materials allow operation in ambient temperatures as low as –60°C and up to 240°C.
- Passes NASA low outgassing specifications
- Constructed with materials that are fungal inert (rating of 0 per MIL-STD-810F)

Terminations Tin-lead (63/37) over copper

Ambient temperature –60°C to +185°C with I_{max} current

Maximum part temperature +240°C (ambient + temp rise)

Storage temperature Component: –60°C to +240°C.

Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +5 to +70 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Part number ¹	Inductance ² (nH)	% tol	Q ³ min	SRF min ⁴ (GHz)	DCR max (mOhm)	I _{max} (A)
AT392RAS8N1_SZ	8.1	5,2	100	4.0	6.0	4.0
AT392RAS12N_SZ	12.1	5,2	100	3.4	7.0	4.0
AT392RAS17N_SZ	16.6	5,2	100	2.9	8.0	4.0
AT392RAS22N_SZ	21.5	5,2	100	2.6	9.0	4.0
AT392RAS27N_SZ	27.3	5,2	100	2.3	10.0	4.0

1. Please specify **tolerance**, **termination** and **screening** codes:

AT392RAS27NGSZ

Tolerance: G = 2% J = 5%

Termination: S = Tin-lead (63/37) over copper.

Special order: T = RoHS tin-silver-copper (95.5/4/0.5)
or L = RoHS compliant tin-silver over copper.

Screening: Z = Unscreened

H = Coilcraft CP-SA-10001 Group A
F = ESCC3201 (F4 operational life performed at 90°C)

1 = EEE-INST-002 (Family 3) Level 1

2 = EEE-INST-002 (Family 3) Level 2

3 = EEE-INST-002 (Family 3) Level 3

4 = MIL-STD-981 (Family 50) Class B

5 = MIL-STD-981 (Family 50) Class S

• Screening performed to the document's latest revision.

• Screening not available for parts with 2% tolerance.

• Testing is performed using 155°C as max component temperature.

• Lot qualification (Group B) available.

• Testing T and U have been replaced with more

detailed codes 4, 5, and 1, 2, 3, respectively. Codes

T and U can still be used, if necessary. Custom testing also available.

• Country of origin restrictions available; prefix option G.

2. Inductance measured at 400 MHz, 0.1 V_{rms}, 0 A using an Agilent/HP 4287A LCR meter or equivalent with a Coilcraft SMD-A test fixture and Coilcraft-provided correlation pieces.

3. Q measured at 400 MHz using an Agilent/HP 4291A impedance analyzer or equivalent.

4. SRF measured using an Agilent/HP 8753 network analyzer or equivalent and a Coilcraft CCF1295 test fixture.

5. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

COILCRAFT ACCURATE
REPEATABLE
PRECISION MEASUREMENTS
SEE WEB SITE **TEST FIXTURES**

Coilcraft CPS

CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2024

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document AT617-1 Revised 11/20/24



This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

AT392RAS Series Air Core Inductors

Q vs Frequency

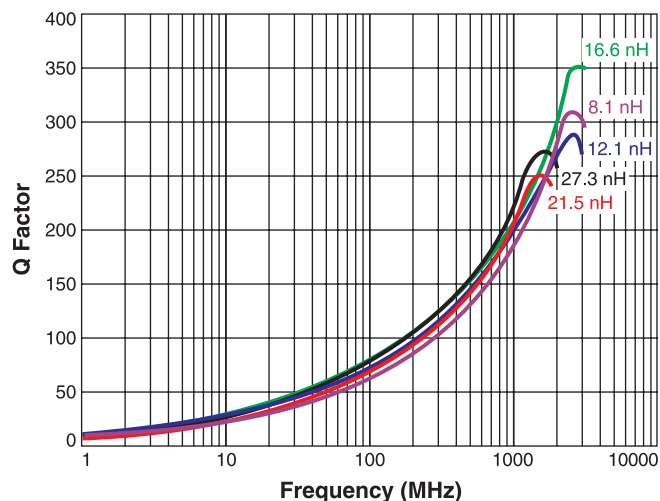

L vs Frequency

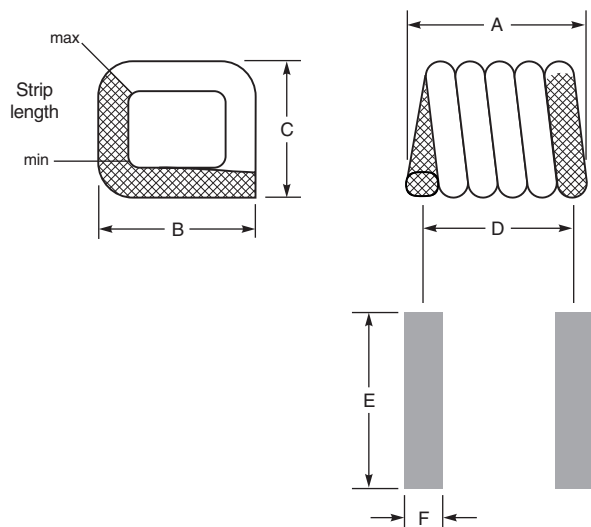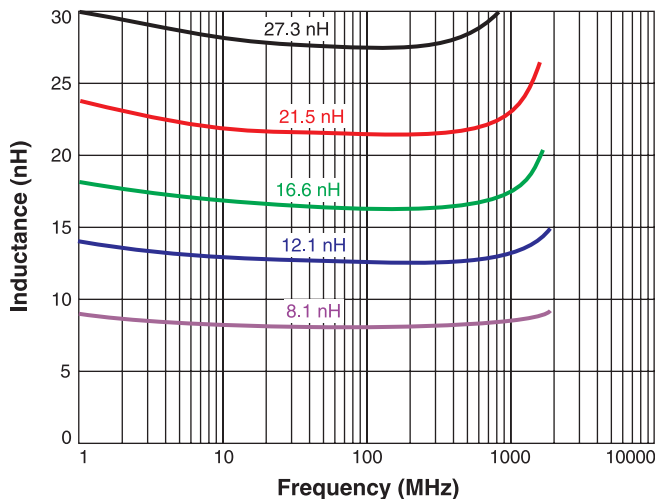

Suggested Land Pattern

Packaging 2000/7" reel; 7500/13" reel
 Plastic tape: 12 mm wide, 0.254 mm thick, 4 mm pocket spacing

Part number	A	B	C	D	E	F	Weight (mg)	Tape pocket depth (mm)
AT392RAS8N1	1,473 ±0,152	2,134 ±0,152	1,829 ±0,203	1,12	2,8	0,64	12,8	2,01
AT392RAS12N	1,854 ±0,152	2,134 ±0,152	1,829 ±0,203	1,45	2,8	0,64	16,9	1,96
AT392RAS17N	2,210 ±0,152	2,134 ±0,152	1,829 ±0,203	1,83	2,8	0,64	21,1	2,01
AT392RAS22N	2,565 ±0,152	2,134 ±0,152	1,829 ±0,203	2,18	2,8	0,64	24,7	1,98
AT392RAS27N	2,972 ±0,152	2,134 ±0,152	1,829 ±0,203	2,57	2,8	0,64	28,7	1,01

All dimensions are in mm.



CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2024

1102 Silver Lake Road
 Cary, IL 60013
 Phone 800-981-0363

Fax 847-639-1508
 Email cps@coilcraft.com
 www.coilcraft-cps.com

Document AT617-2 Revised 11/20/24

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.