


High Reliability Power Inductors ML611PYA

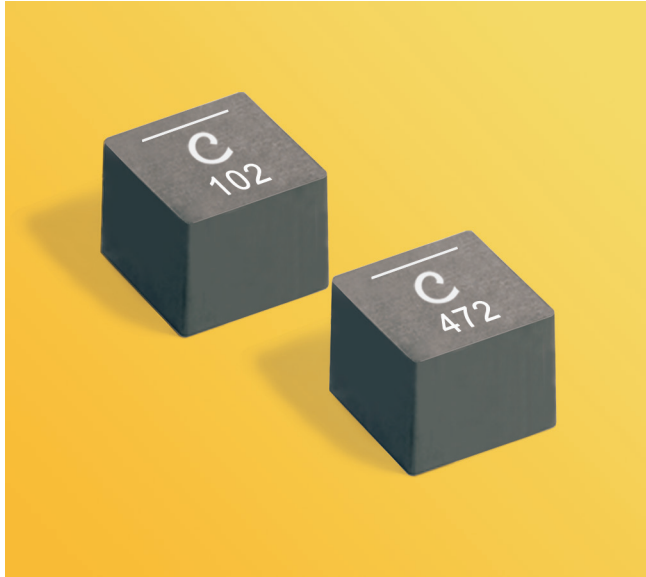

- High temperature materials allow operation in ambient temperatures up to 155°C
- High current and very low DCR
- Soft saturation makes them ideal for VRM/VRD applications.

Core material Composite

Terminations Tin-silver over copper.

Weight 5.7 – 6.3 g

Ambient temperature –55°C to +105°C with Irms current

Maximum part temperature +155°C (ambient + temp rise).

Storage temperature Component: –55°C to +155°C.
Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 300/13" reel
Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing, 10.21 mm pocket depth

Part number ¹	Inductance ² ±20% (µH)	DCR (mOhms) ³		SRF (MHz) ⁴		Isat (A) ⁵	Irms (A) ⁶	
		typ	max	min	typ		20°C rise	40°C rise
ML611PYA221MLZ	0.22	0.45	0.50	92	115	98.8	30.8	41.6
ML611PYA451MLZ	0.45	0.65	0.72	53	66	70.5	30.0	39.8
ML611PYA681MLZ	0.68	0.87	0.96	42	53	62.0	36.0	48.0
ML611PYA102MLZ	1.0	1.00	1.10	34	42	55.0	24.0	32.6
ML611PYA152MLZ	1.5	1.60	1.76	26	33	36.6	23.3	30.4
ML611PYA222MLZ	2.2	2.55	2.80	18	22	34.0	18.4	24.0
ML611PYA332MLZ	3.3	3.70	4.10	17	21	27.4	13.7	18.8
ML611PYA472MLZ	4.7	5.20	5.70	15	19	25.4	13.1	18.0
ML611PYA562MLZ	5.6	6.30	6.93	13	16	23.6	11.8	15.9
ML611PYA682MLZ	6.8	8.10	8.90	11	14	21.8	10.5	13.9
ML611PYA822MLZ	8.2	11.70	12.90	9	12	18.3	9.7	12.8
ML611PYA103MLZ	10	13.40	14.75	8	11	17.5	8.6	11.6
ML611PYA153MLZ	15	16.90	18.60	7	9	15.5	7.4	10.4

1. When ordering, please specify **screening** code:

ML611PYA153MLZ

Screening: Z = Unscreened

Y = Unscreened (SLDC Option A)

W = Unscreened (SLDC Option B)

H = Group A screening per Coilcraft CP-SA-10001

G = Coilcraft CP-SA-10001 Group A (SLDC Option A)

D = Coilcraft CP-SA-10001 Group A (SLDC Option B)

All screening performed to the document's latest revision

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using an Agilent/HP 4395A or equivalent.

5. DC current at 25°C that causes an inductance drop of 30% (typ) from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Irms Testing

Irms testing was performed on a 0.060" thick pcb with 4 oz. copper traces optimized to minimize additional temperature rise.

Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

© Coilcraft, Inc. 2023











Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML804-1 Revised 05/24/23

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ML611PYA Series (1010)

Typical L vs Current

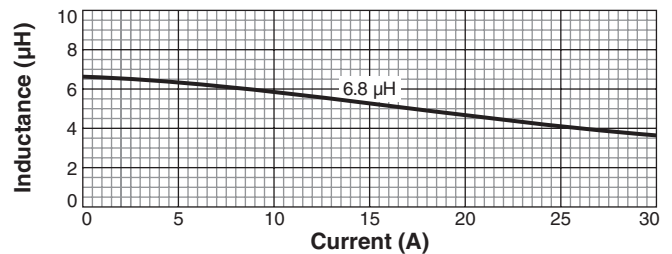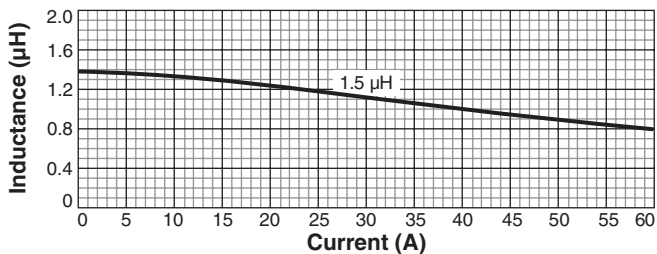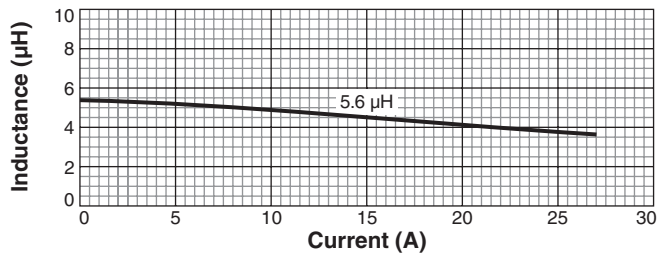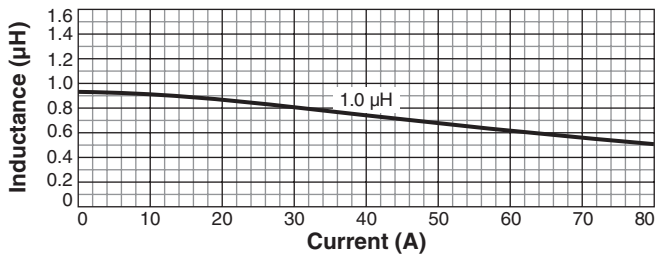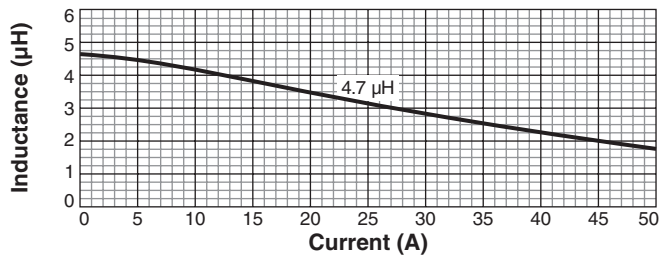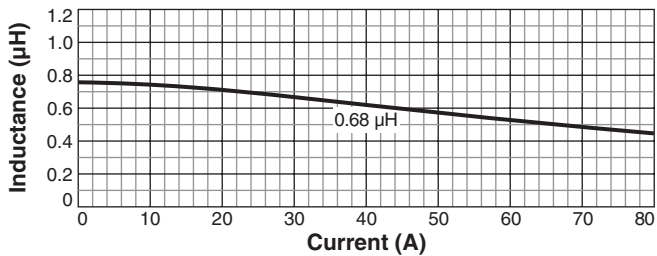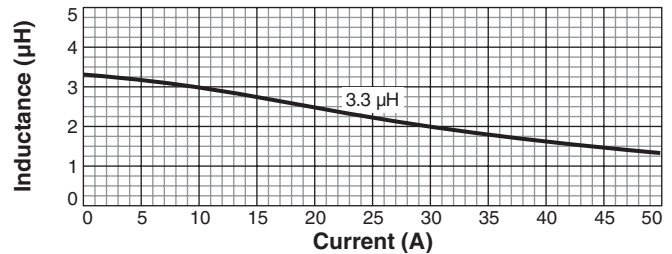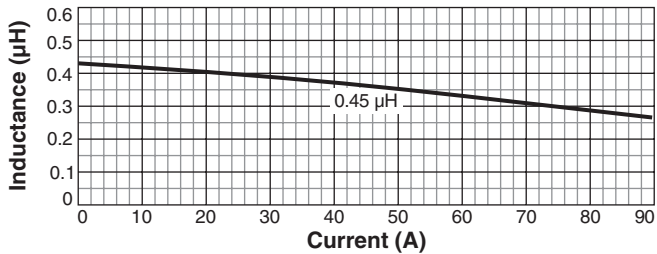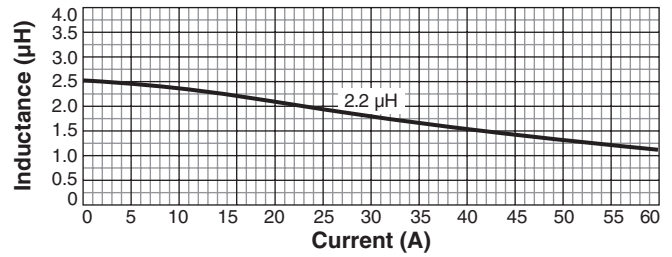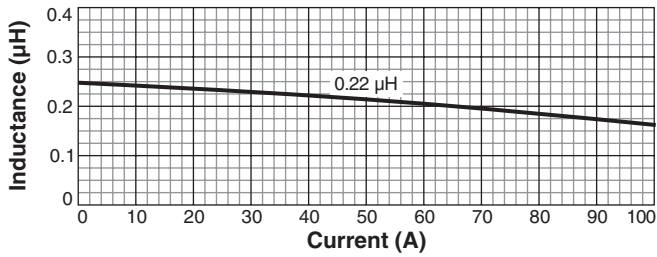

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

© Coilcraft, Inc. 2023




Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML804-2 Revised 05/24/23






This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ML611PYA Series (1010)

Typical L vs Current

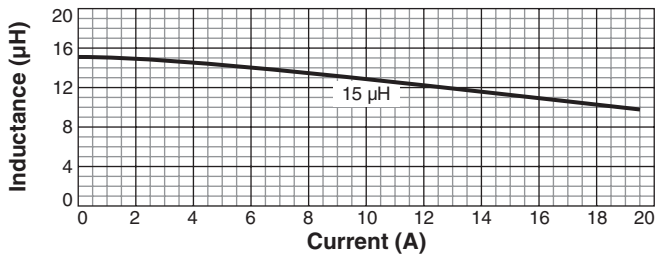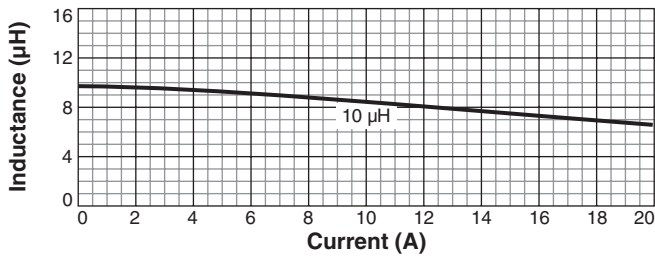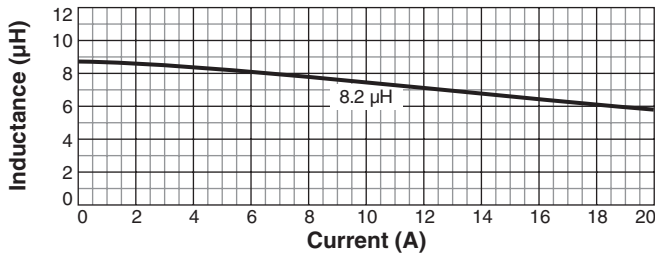

Typical L vs Frequency

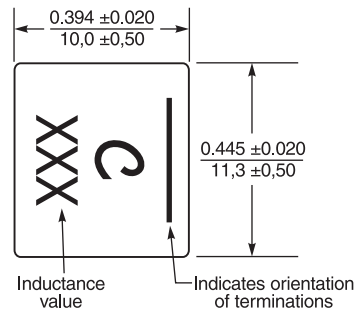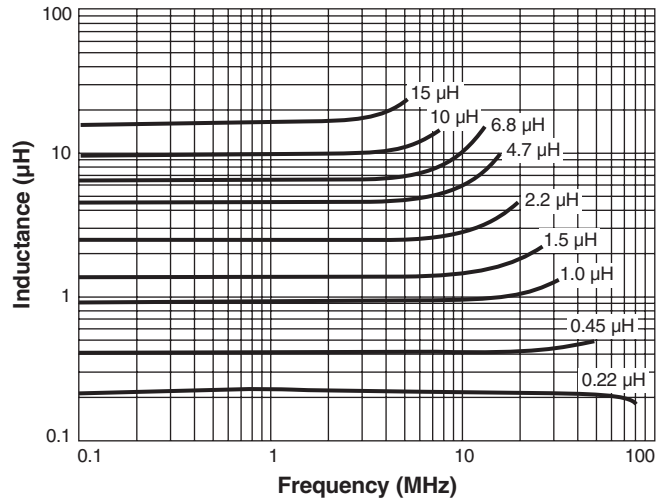

Suggested Land Pattern

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2023

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML804-3 Revised 05/24/23

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ML611PYA Series (1010)



© Coilcraft, Inc. 2023

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML804-4 Revised 05/24/23

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.